


Krokwie stalowe

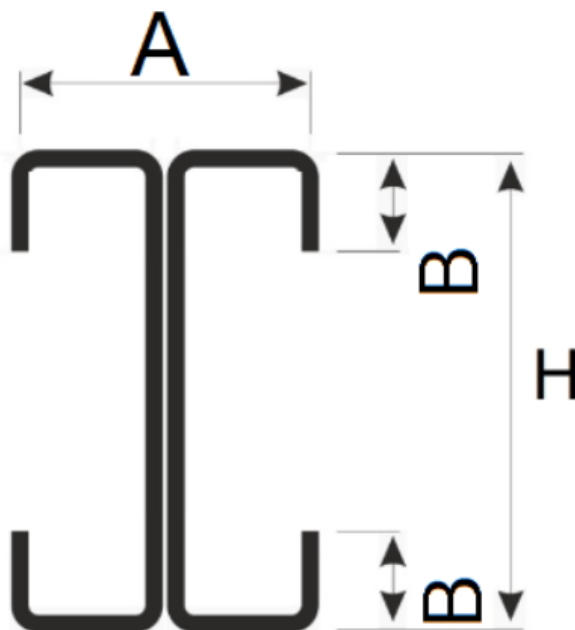


Parametry

	Grubość blachy [mm]	Waga [kg/m]	H [mm]	A [mm]	B [mm]
┐┐ 100	1,5	5,28	100	96	17
	2,0	7,04	100	96	18
	2,5	8,72	100	96	18
	3,0	10,46	100	96	19
┐┐ 100	1,5	5,76	100	120	18
	2,0	7,68	100	120	19
	2,5	9,52	100	120	18
	3,0	11,42	100	120	19


	Grubość blachy [mm]	Waga [kg/m]	H [mm]	A [mm]	B [mm]
□ 150	1,5	6,48	150	96	17
	2,0	8,64	150	96	18
	2,5	10,72	150	96	18
	3,0	12,86	150	96	19
□ 150	1,5	7,20	150	120	18
	2,0	9,60	150	120	19
	2,5	11,92	150	120	18
	3,0	14,30	150	120	19
□ 200	1,5	7,68	200	96	17
	2,0	10,24	200	96	18
	2,5	12,72	200	96	18
	3,0	15,26	200	96	19
□ 200	1,5	8,40	200	120	21
	2,0	11,20	200	120	22
	2,5	13,92	200	120	21
	3,0	16,70	200	120	22
□ 250	1,5	9,00	250	96	17
	2,0	12,00	250	96	18
	2,5	14,80	250	96	18
	3,0	17,76	250	96	19
□ 250	1,5	9,60	250	120	21
	2,0	12,80	250	120	22
	2,5	15,92	250	120	21
	3,0	19,10	250	120	22

	Grubość blachy [mm]	Waga [kg/m]	H [mm]	A [mm]	B [mm]
□ 300	1,5	10,04	300	96	17
	2,0	13,38	300	96	18
	2,5	16,56	300	96	18
	3,0	19,88	300	96	19
□ 300	1,5	10,66	300	120	21
	2,0	14,20	300	120	21
	2,5	17,44	300	120	21
	3,0	20,92	300	120	22
□ 350	1,5	12,52	350	150	20
	2,0	16,72	350	150	20
	2,5	20,80	350	150	20
	3,0	24,96	350	150	20
□ 400	2,5	22,64	400	150	20
	3,0	27,16	400	150	20

PRZEKRÓJ RAMY

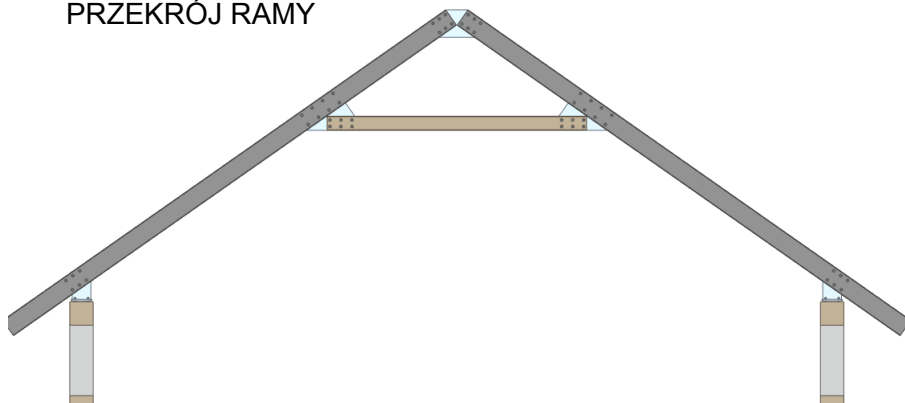


WIDOK Z BOKU

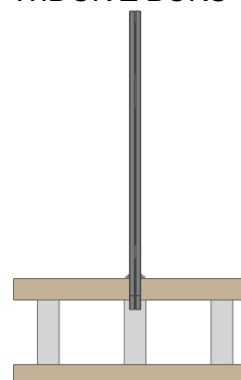


RZUT Z GÓRY



POŁĄCZENIE KALENICY

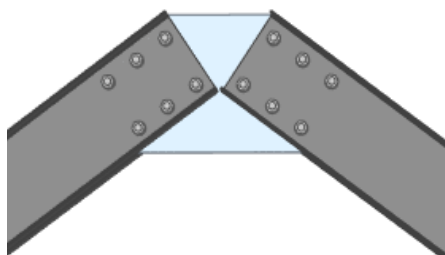

OPARCIE RAMY



ŁĄCZENIE Z JĘTKĄ

