


Profil C

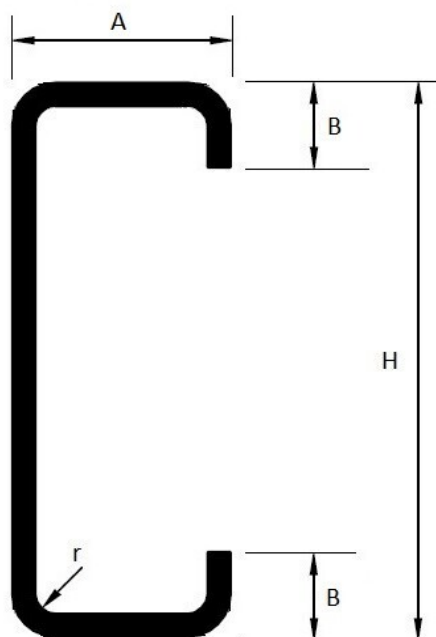

A - Szerokość półki
H - Wysokość całkowita

Parametry

	Grubość blachy (mm)	Waga (kg/m)	H (mm)	A (mm)	B (mm)
C 100	1,5	2,70	100	48	17
	2,0	3,64	100	48	18
	2,5	4,55	100	48	18
	3,0	5,51	100	48	19
C 100	1,5	3,01	100	60	18
	2,0	4,05	100	60	19
	2,5	5,02	100	60	18
	3,0	6,07	100	60	19
C 150	1,5	3,30	150	48	17
	2,0	4,43	150	48	18
	2,5	5,50	150	48	18
	3,0	6,64	150	48	19
C 150	1,5	3,60	150	60	18
	2,0	4,83	150	60	19
	2,5	6,00	150	60	18
	3,0	7,25	150	60	19

C 200	1,5	3,89	200	48	17
	2,0	5,21	200	48	18
	2,5	6,51	200	48	18
	3,0	7,86	200	48	19
C 200	1,5	4,26	200	60	21
	2,0	5,71	200	60	22
	2,5	7,10	200	60	21
	3,0	8,57	200	60	22
C 250	1,5	4,47	250	48	17
	2,0	6,00	250	48	18
	2,5	7,50	250	48	18
	3,0	9,04	250	48	19
C 250	1,5	4,85	250	60	21
	2,0	6,50	250	60	22
	2,5	8,08	250	60	21
	3,0	9,75	250	60	22

C 300	1,5	5,06	300	48	17
	2,0	6,78	300	48	18
	2,5	8,48	300	48	18
	3,0	10,22	300	48	19
C 300	1,5	5,44	300	60	21
	2,0	7,25	300	60	21
	2,5	9,06	300	60	21
	3,0	10,92	300	60	22